



Molded In-line Fitting
Remote Mount Display
Three Display Options:

- Rate & Total Display Only
- Rate, Total, Analog output
- Rate, Total, Process Control

Features:

- High accuracy digital paddlewheel technology.
- 3/8", 1/2", 3/4", 1", 1-1/2", and 2" male pipe threads.
- Flow rate from .4 to 200 GPM (1 to 700 LPM)
- Rate and total flow display.
- Optional Process Control alarm or batch processing relay.
- Optional 4-20mA or 0-10VDC output.

- Large, 8 digit LCD display, up to 4 decimal places.
- Remote mount display on panel, pipe or wall.
- Very low pressure drop.
- Total reset function can be disabled.
- Front panel security lock-out.
- Field programmable.

Specifications:

Max. working pressure:300 PSI (20 bar) @ 70° F (21° C)
 Max. fluid temperature:200° F (93° C) @ 0 PSI
 Max. ambient temperature: ..14° to 110° F/ -10° to 43° C
 Full scale accuracy: +/- 1%
 Power requirement:16-24VDC
 Model RT units only:4 AA batteries or AC/DC transformer
 All units: AC/DC transformer

Signal Distance: AC sine wave sensor = 200 ft (60 m)
 Optional Hall Effect sensor = 1 mile (1.6 km)
 Signal Cable: 3 conductor shielded. Included 25 ft. (7,6 m)
 Max pressure drop: 8 PSI (varies per model)
 Enclosure: NEMA 4X (IP56)
 Approx ship wt: 2 lb. (.91 kg)

Materials of Construction:


Pipe fitting:Polypropylene (options: PVDF)
 Sensor, paddlewheel, axle: ..PVDF
 Sensor O-ring seals:Viton® (optional EP)

Installation Requirements:

Minimum Straight Pipe Length Requirements

The meter's accuracy is affected by disturbances such as pumps, elbows, tees, valves, etc., in the flow stream. Install the meter in a straight run of pipe as far as possible from any disturbances. The distance required for accuracy will depend on the type of disturbance.



Type Of Disturbance	Minimum Inlet Pipe Length	Minimum Outlet Pipe Length
Flange	10 X Pipe I.D.	5 X Pipe I.D.
Reducer	15 X Pipe I.D.	5 X Pipe I.D.
90° Elbow	20 X Pipe I.D.	5 X Pipe I.D.
Two Elbows -1 Direction	25 X Pipe I.D.	5 X Pipe I.D.
Two Elbows -2 Directions	40 X Pipe I.D.	5 X Pipe I.D.
Pump Or Gate Valves	50 X Pipe I.D.	5 X Pipe I.D.

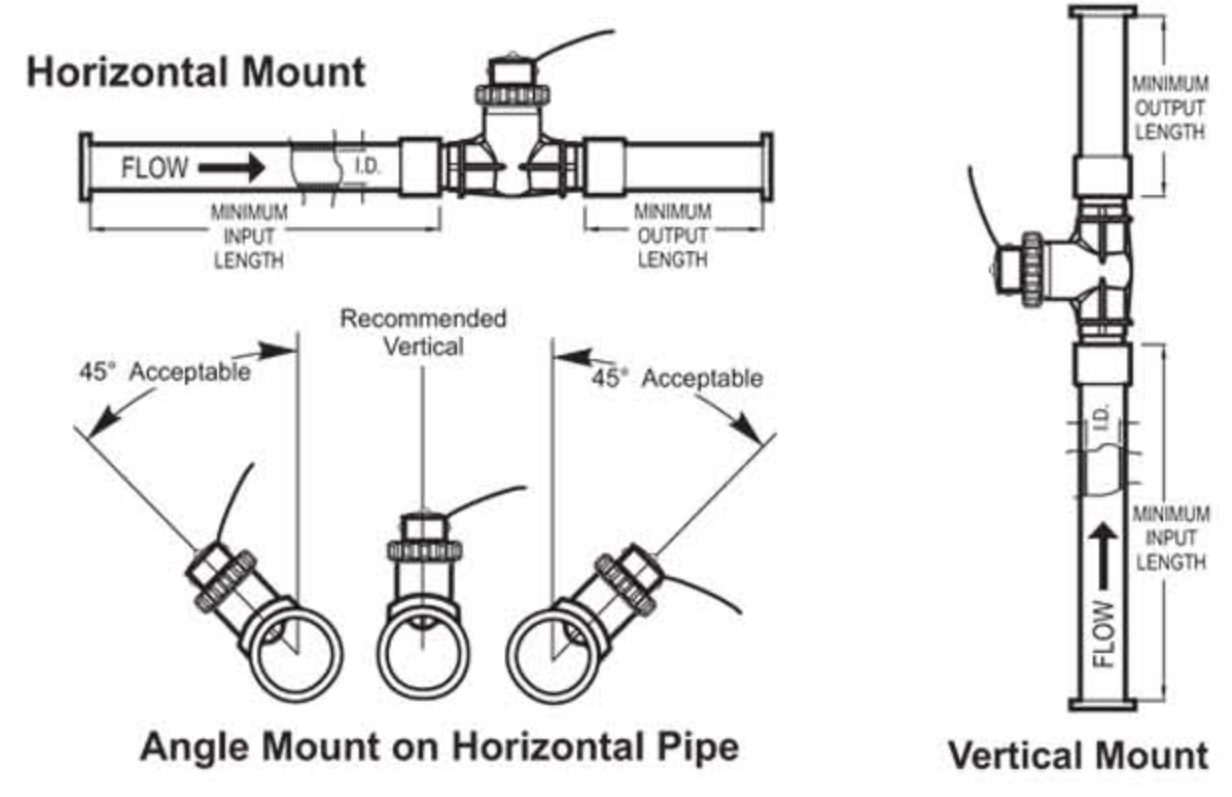

Mounting location

- The meter is designed to withstand outdoor conditions. A cool, dry location, where the unit can be easily serviced is recommended.
- The meter can be mounted on horizontal or vertical runs of pipe. Mounting at the vertical (twelve o'clock) position on horizontal pipe is recommended. Mounting anywhere around the diameter of vertical pipe is acceptable, however, the pipe must be completely full of water at all times. Back pressure is essential on downward flows. See the minimum straight length of pipe requirement chart above.
- The meter can accurately measure flow from either direction.


Dimensions:

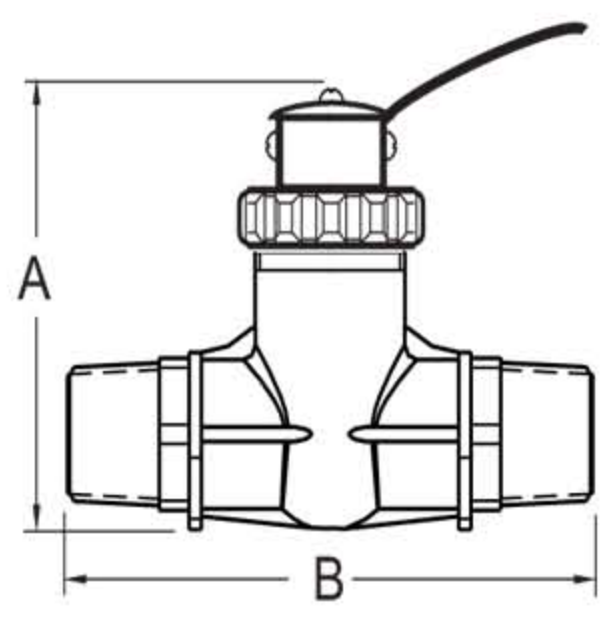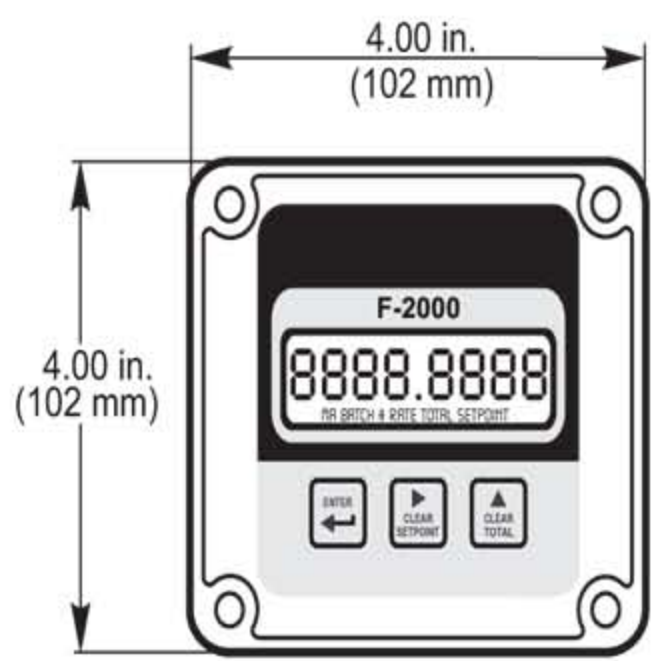

Pipe Size	A	B
3/8"	3-3/4" (95)	4-3/4" (121)
1/2"	3-3/4" (95)	5-1/8" (130)
3/4"	4" (102)	5-1/4" (133)
1"	4" (102)	5-5/8" (143)
1-1/2"	4-1/2" (114)	6-1/2" (165)
2"	4-3/4" (121)	6-3/4" (171)

Inches (mm)

Maximum Temperature vs. Pressure

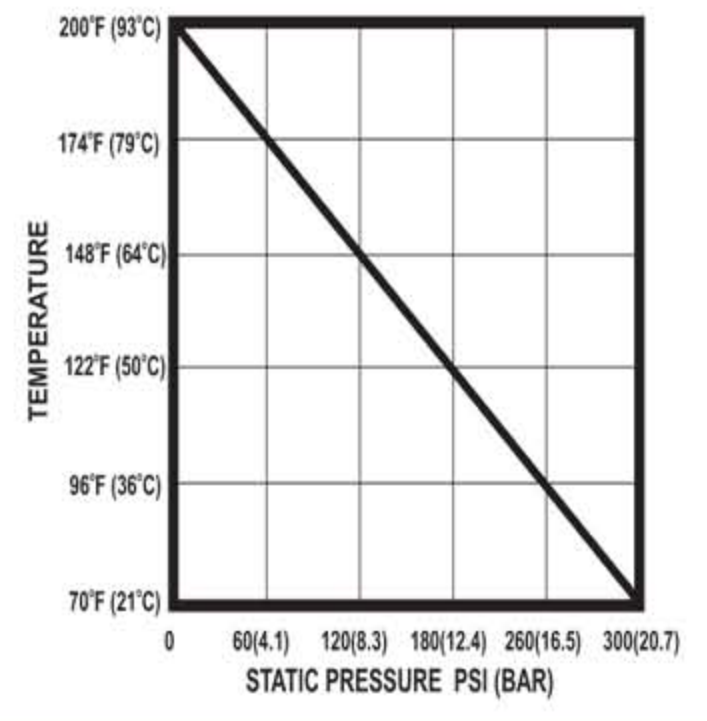

Flow Stream Requirements:

Measuring accuracy requires a fully developed **turbulent** flow profile. Pulsating, swirling and other disruptions in the flow stream will effect accuracy. Flow conditions with a **Reynolds Number** greater than 4000 will result in a fully developed **turbulent** flow. A Reynolds Number less than 2000 is **laminar** flow and may result in inaccurate readings.

$$\text{REYNOLDS NUMBER} = \frac{3160 \times Q \times G}{D \times V}$$

- Where:
- Flow rate of the fluid in GPM = Q
 - Specific gravity of the fluid = G
 - Pipe inside diameter in inches = D
 - Fluid viscosity in centepoise = V

